

EasyGate IM

The EasyGate IM combines high security and aesthetics in this ultra modern design. With brushed stainless steel housing and clad in solid surface Corian the EasyGate IM forms a unique bespoke look.

MAIN FEATURES

- Low maintenance brushless operation – Patented Magnetic Direct Drive
 - Adjustable speed and torque for ultimate performance
 - Optional integrated LCD display for lift call control
 - Customisable solid surface cladding and housing
 - Push through feature for easy evacuation*
 - High Glass wings available for increased security
- * Optional upgrade

DIMENSIONS

Cabinet height: 995mm
 Cabinet length: 1500mm
 Cabinet width: 210mm
 Barrier height: 1200-1800mm

NUMBER OF WINGS

1 Wing/ 2 Wings

PASSAGE WIDTH

1 wing

Standard width: 550mm
 Max Passage width: 550mm

2 wing

Standard width: 650mm
 Max Passage width: 1050mm

BASE AND HOUSING

Brushed Stainless Steel (AISI 304)

TOP LID

Corian solid surface material

BARRIER

Glass Wing (10mm, tempered)

SIDE INFILL PANEL

6mm tempered glass

POWER SUPPLY

230V AC



COMMUNICATION INTERFACE

RS-485/ USB/ Ethernet

NUMBER OF SENSORS

36 pairs

TAILGATING AND CROSS OVER DETECTION

Yes

CLIMBOVER DETECTION

Yes - electronic detection

RANGE OF OPERATING TEMPERATURE

-20°C to +50°C

OPERATING ENVIRONMENT

Indoor

EMERGENCY MODE

Open manually or automatically
 (with power backup)

BRAKE CONTROL FUNCTION


Brake force in excess of 650N, Hardened tooth lock brake

MCBF

15,000,000 cycles (Based on recommended maintenance schedule)

OPTIONAL ACCESSORIES

- LED lane light
- Wing light
- Integrated visitor card collector
- Integrated 3rd party terminals
- Custom Top Lid – Matt RAL Finish/ Ployston
- Custom Base and Housing – RAL powder coated steel
- Low iron glass wings

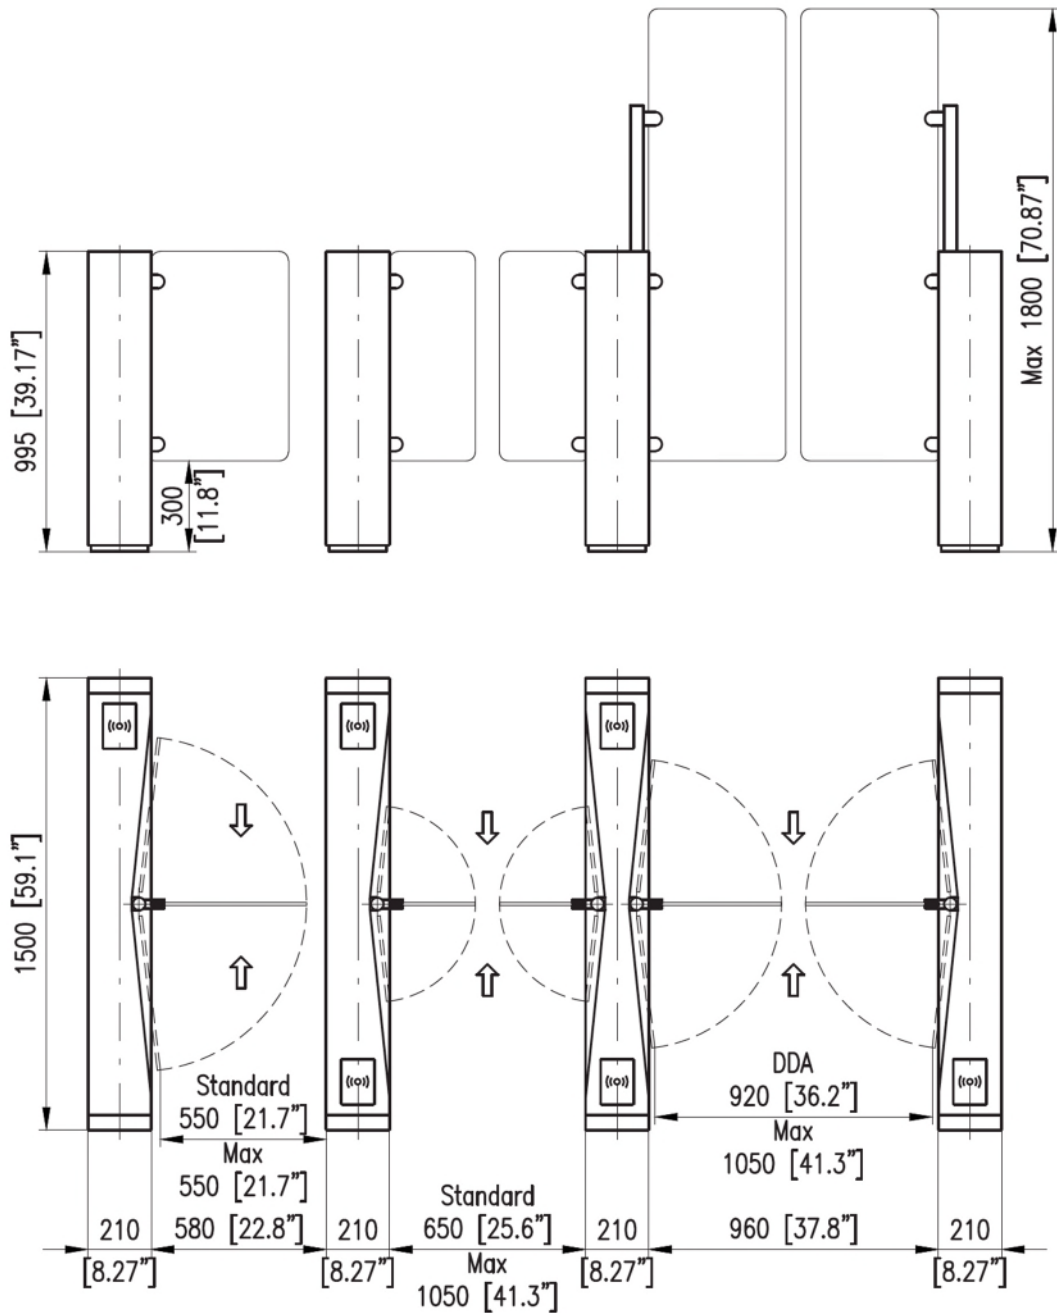

As our policy is to continually improve the products we offer, we reserve the right to amend specifications without prior notice. Further product drawings are available on request